



DecoreSUN Series | Thermo Panels

Product Catalog 2024

English



TOPSUN HEATING THE INNOVATIVE TECHNOLOGY

TopSUN Heating Inc. is an international Canadian-Iranian manufacturer headquartered in British Columbia focused on developing innovative, green and smart electric heating solutions.

Our goal is the global use of new and innovative electric heating equipment that leads our users to safe and green sources of energy.

TopSUN products are the result of commitment to research, product innovation and exceptional services, which are produced and supplied according to the needs and requests of heating system users for more comfort and easier life.

We want to change the way people heat by developing heating systems that are smarter, easier to use and maintenance-free, while using less energy, being more cost-effective and offering modern, luxurious comfort.

With TopSUN electric heating technologies, we strive to create a smart, green, sustainable, affordable, luxurious and modern future for all of us.











Smart, Beautiful & Green Heating



Clean Energy



Fast Speed Execution



BMS Integration



No Fluid



Remote Control



Low thickness



Uniform Temperature



Safe & Risk-free



Electrical & Battery



After Sale Services



Radiators & Towel Dryer

Wall Radiator

(Thermo Panel)



Tempered Glass

8 mm

Size 12 Sizes

Material

Thickness

Layout Single Panel | Multi Panels

Dist. to Wall 3 cm Max .Temp. 85°C Covering Area. $2 \sim 35 \, \text{m}^2$

Custom Image

Image Catalog

Indiviual Image (Family, Friends,..)

Internet Searching Images

Photographing Image

Install Type Vertical | Horizontal | Angled

Optm. Inst. Height $1.2 \sim 1.8 \, \text{m}$

Power 150 - 1800 W/m Voltage 110 - 240 V | AC

12 - 24 V | DC

Warranty 10 Years (Lifetime Guarantee)

Towel Dryer

(Thermo Panel)



Tempered Glass

8 mm

12 Sizes

Single Panel

5 cm

65°C

 $2 \sim 12 \, \text{m}^2$

Image Catalog

Indiviual Image (Family, Friends,..)

Internet Searching Images

Photographing Image

Vertical

 $1.2 \sim 1.8 \, \text{m}$

150 - 500 W/m

110 - 240 V | AC

12 - 24 V | DC

10 Years (Lifetime Guarantee)





Mono Part I Wall Radiators

Code	Product	Dimension	Power	Coverage
D-901	DecorSUN Glass Radiator	50 × 50 cm	150 W	2 ~ 3 m ²
D-902	DecorSUN Glass Radiator	50 × 90 cm	250 W	$5 \sim 7 \text{ m}^2$
D-903	DecorSUN Glass Radiator	50 × 110 cm	400 W	$9 \sim 11 \text{ m}^2$
D-904	DecorSUN Glass Radiator	$50 \times 150 \text{ cm}$	500 W	$11 \sim 13 \text{ m}^2$
D-905	DecorSUN Glass Radiator	90 × 90 cm	500 W	$10 \sim 12 \text{ m}^2$
D-906	DecorSUN Glass Radiator	$90 \times 110 \text{ cm}$	700 W	$12 \sim 15 \text{ m}^2$
D-907	DecorSUN Glass Radiator	90×150 cm	800 W	$15 \sim 18 \text{ m}^2$
D-908	DecorSUN Glass Radiator	90 × 200 cm	900 W	18 ~ 20 m ²
D-909	DecorSUN Glass Radiator	60 × 60 cm	200 W	$3 \sim 4 \text{ m}^2$
D-910	DecorSUN Glass Radiator	60 × 80 cm	250 W	$4 \sim 6 \text{ m}^2$
D-911	DecorSUN Glass Radiator	$60 \times 110 \text{ cm}$	400 W	$10 \sim 12 \text{ m}^2$
D-912	DecorSUN Glass Radiator	$60 \times 130 \text{ cm}$	500 W	$11 \sim 13 \text{ m}^2$

- For the registration of custom products (dimensions, shape and form material) inquiries must be contact to the sales department for order placement
- The minimum order quantity for custom products is 20 dimensional pieces of each specification.




Thermo Panel - Wall Radiant Panel






MODERN GREEN SMART HEATING

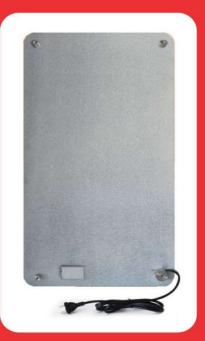



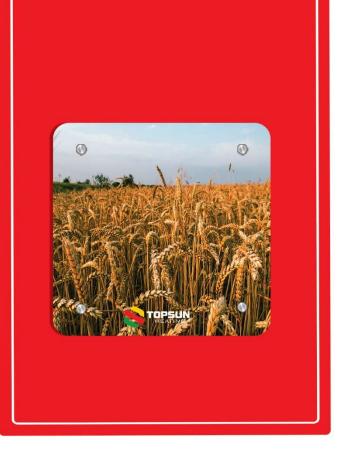



 $\begin{array}{ll} \text{Dimensions} & 50 \times 50 \text{ cm} \\ \text{Coverage Area} & 2 - 3 \text{ m}^2 \\ \text{Power Consumption} & 150 \text{ Watts} \end{array}$

Remote Control Yes Ambient Termostat Yes

Surface 0.25 m²









Dimensions50 × 90 cmCoverage Area5 - 7 m²Power Consumption250 Watts

Remote Control Yes Ambient Termostat Yes

Surface 0.45 m²










D-903 WALL RADIATOR

Dimensions $50 \times 110 \text{ cm}$ Coverage Area $9 - 11 \text{ m}^2$

Power Consumption 400 Watts

Remote Control Yes Ambient Termostat Yes

Surface 0.55 m²

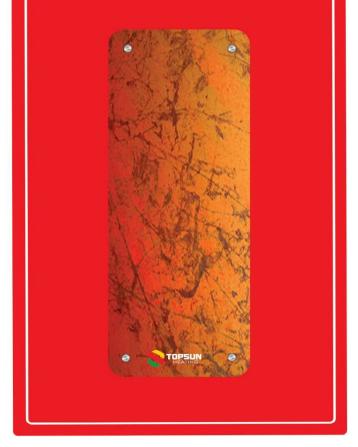



Dimensions $50 \times 150 \text{ cm}$ Coverage Area $11 - 13 \text{ m}^2$ Power Consumption 500 Watts

Remote Control Yes Ambient Termostat Yes

Surface 0.75 m²







D-905 WALL RADIATOR

 $\begin{array}{ll} \text{Dimensions} & 90 \times 90 \text{ cm} \\ \text{Coverage Area} & 10 - 12 \text{ m}^2 \\ \text{Power Consumption} & 500 \text{ Watts} \end{array}$

Remote Control Yes
Ambient Termostat Yes
Surface 0.81 m²





Dimensions $90 \times 110 \text{ cm}$ Coverage Area $12 - 15 \text{ m}^2$ Power Consumption 700 Watts

Remote Control Yes Ambient Termostat Yes

Surface 0.99 m²











Dimensions $90 \times 150 \text{ cm}$ Coverage Area $15 - 18 \text{ m}^2$ Power Consumption 800 Watts

Remote Control Yes Ambient Termostat Yes

Surface 1.35 m²









Dimensions $90 \times 200 \text{ cm}$ Coverage Area $18 - 20 \text{ m}^2$ Power Consumption 900 Watts


Remote Control Yes Ambient Termostat Yes

Surface 1.80 m²







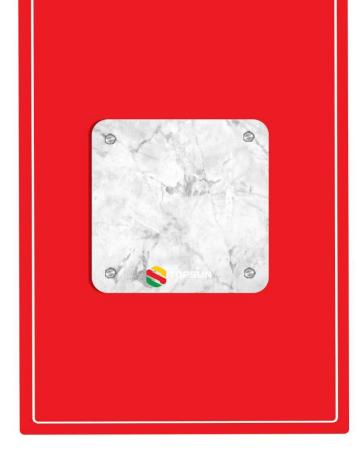



Dimensions 60 × 60 cm Coverage Area 3 - 4 m² Power Consumption 200 Watts

Remote Control Yes Ambient Termostat Yes

Surface 0.36 m²










Dimensions 60 × 80 cm Coverage Area 4 - 6 m² Power Consumption 250 Watts Remote Control Yes

Ambient Termostat Yes

Surface 0.48 m²





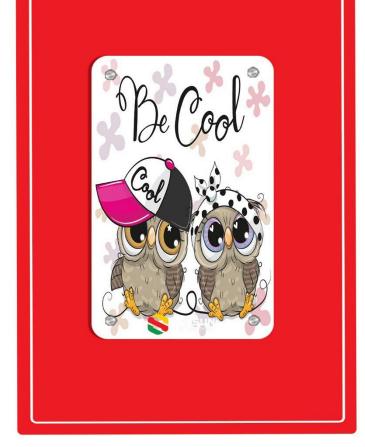



Dimensions 60 × 110 cm Coverage Area 10 - 12 m² Power Consumption 400 Watts

Remote Control Yes Ambient Termostat Yes

Surface 0.66 m²







D-912 WALL RADIATOR

Dimensions $60 \times 130 \text{ cm}$ Coverage Area $11 - 13 \text{ m}^2$ Power Consumption500 Watts

Remote Control Yes Ambient Termostat Yes

Surface 0.78 m²



Multi Parts I Wall Radiators

Code Product	t	Dimension	Power	Coverage
D-913 DecorSUN La	ayout 1	90 × 150 cm (3 Parts)	750 W	15 ~ 20 m²
		$3\times(90\times50\text{ cm})$		
D-914 DecorSUN La	ayout 2	110×150 cm (3 Parts)	1200 W	$27 \sim 32 \text{ m}^2$
		$3\times(110\times50\text{ cm})$		
D-915 DecorSUN La	ayout 3	110×150 cm (3 Parts)	900 W	$18 \sim 24 \text{ m}^2$
		$2\times(90\times50\text{ cm})$		
		$1\times(110\times50\text{ cm})$		
D-916 DecorSUN La	ayout 4	150×250 cm (5 Parts)	1800 W	$30 \sim 35 \text{ m}^2$
		$2\times(90\times50\text{ cm})$		
		$2\times(110\times50\text{ cm})$		
		$1\times(150\times50\text{ cm})$		
D-917 DecorSUN La	ayout 5	50×150 cm (3 Parts)	450 W	$5 \sim 9 \text{ m}^2$
		$3\times(50\times50\text{ cm})$		
D-918 DecorSUN La	ayout 6	110 × 150 cm (5 Parts)	1000 W	15 ~ 20 m ²
		$4 \times (50 \times 50 \text{ cm})$		
		$1 \times (110 \times 50 \text{ cm})$		
D-919 DecorSUN La	ayout 7	60 × 180 cm (3 Parts)	600 W	8 ~ 10 m ²
		$3 \times (60 \times 60 \text{ cm})$		
D-920 DecorSUN La	yout 8	130 × 180 cm (5 Parts)	1300 W	20 ~ 25 m ²
		4×(60 × 60 cm)		
		$1 \times (60 \times 130 \text{ cm})$		






Panels $90 \text{ cm} \times 50 \text{ cm} | N = 3$

Coverage Area 15 - 20 m²
Panels Align Vertical
Inst. Direction Horizontal
Power 750 Watts

Remote Control Yes

Thermostat Optional / Yes

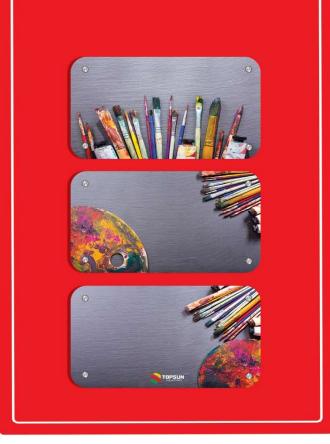

PANELS ALIGN INS. DIRECTION



D913
MULTI THERMO PANELS





Panels

 $110 \text{ cm} \times 50 \text{ cm} | N = 3$

Coverage Area

27 - 32 m²

Panels Align

Vertical Horizontal

Inst. Direction
Power

1200 Watts

Remote Control

Yes

Thermostat

Optional / Yes

Custom Image

Yes



PANELS ALIGN INS. DIRECTION



D914
MULTI THERMO PANELS





Panels

 $110 \text{ cm} \times 50 \text{ cm} | N = 1$

90 cm x 50 cm | N = 2

Coverage Area

Vertical

Panels Align

Inst. Direction

Horizontal

18 - 24 m²

Power


900 Watts

Remote Control Yes Thermostat

Optional / Yes

Custom Image

Yes

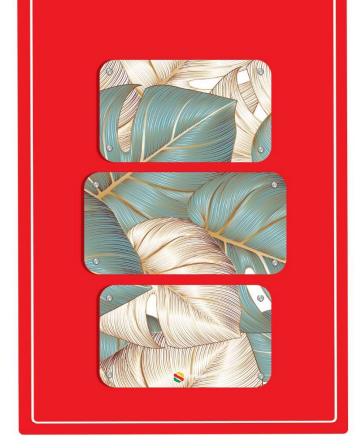

PANELS ALIGN INS. DIRECTION










Panels 150 cm x 50 cm | N = 1

110 cm x 50 cm|N| = 290 cm x 50 cm|N| = 2

Coverage Area 30 - 35 m²
Panels Align Vertical
Inst. Direction Horizontal
Power 1800 Watts

Remote Control Yes

Thermostat Optional / Yes

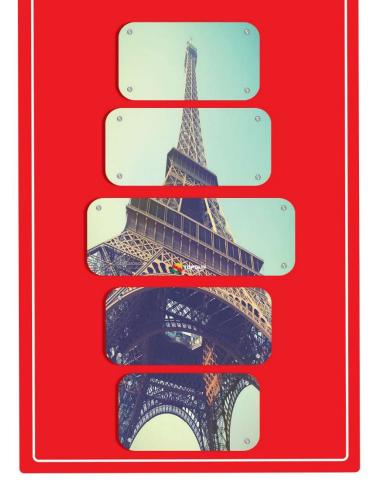

PANELS ALIGN INS. DIRECTION



D916
MULTI THERMO PANELS





Panels 50 cm x 50 cm | N = 3

Coverage Area 5 - 9 m²

Panels Align -

Inst. Direction Horizontal Power 450 Watts

Remote Control Yes

Thermostat Optional / Yes

Custom Image Yes











Panels

 $110 \text{ cm} \times 50 \text{ cm} | N = 1$

 $50 \text{ cm} \times 50 \text{ cm} | N = 4$

Coverage Area Panels Align

Vertical

Inst. Direction

15 - 20 m²

Power

Horizontal 1000 Watts

Remote Control


Yes

Thermostat

Optional / Yes

Custom Image

Yes

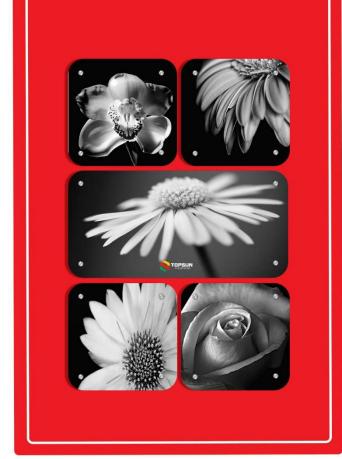



D918
MULTI THERMO PANELS





Panels 60 cm x 60 cm | N = 3

Coverage Area 8 - 10 m²


Panels Align

Inst. Direction Vertical Power 600 Watts

Remote Control Yes


Thermostat Optional / Yes

Custom Image Yes

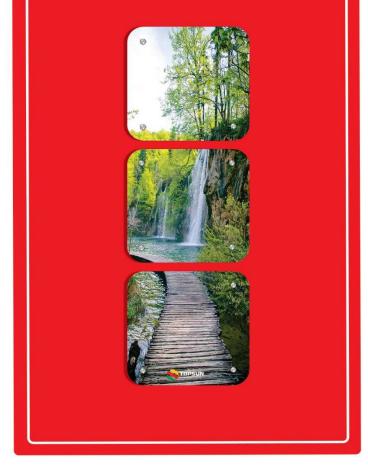



D919
MULTI THERMO PANELS

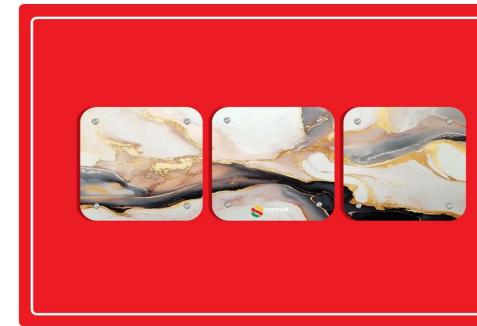



Panels

 $60 \text{ cm} \times 60 \text{ cm} | N = 3$

 $130 \text{ cm} \times 60 \text{ cm} | N = 1$

Coverage Area

20 - 25 m²

Panels Align

Vertical

Inst. Direction

Horizontal

Power

1300 Watts

Remote Control

Yes

Thermostat

Optional / Yes

Custom Image

Yes











Towel Dryer DecorSUN





Rectangle Groove Towel Dryer



Narrow Groove Towel Dryer



Composite Hanger Towel Dryer



Bar Hanger Towel Dryer



Bar Hanger I Towel Dryer

Code	Product	Dimension	Power	Coverage
T-102	DecorSUN Towel Dryer	50 × 50 cm	150 W	2 ~ 3 m²
T-103	DecorSUN Towel Dryer	$50 \times 90 \text{ cm}$	250 W	$4 \sim 6 \text{ m}^2$
T-108	DecorSUN Towel Dryer	$50 \times 110 \text{ cm}$	400 W	$8 \sim 10 \text{ m}^2$
T-113	DecorSUN Towel Dryer	$50 \times 150 \text{ cm}$	500 W	$10 \sim 12 \text{ m}^2$

Narrow Groove I Towel Dryer

Code	Product	Dimension	Power	Coverage
T-101	DecorSUN Towel Dryer	50 × 50 cm	150 W	2 ~ 3 m ²
T-105	DecorSUN Towel Dryer	$50 \times 90 \text{ cm}$	250 W	$4 \sim 6 \text{ m}^2$
T-110	DecorSUN Towel Dryer	$50 \times 110 \text{ cm}$	400 W	$8 \sim 10 \text{ m}^2$
T-115	DecorSUN Towel Dryer	$50 \times 150 \text{ cm}$	500 W	10 ~ 12 m ²

Rectangle Groove I Towel Dryer

Code	Product	Dimension	Power	Coverage
T-106	DecorSUN Towel Dryer	50 × 90 cm	250 W	4 ~ 6 m²
T-111	DecorSUN Towel Dryer	$50 \times 110 \text{ cm}$	400 W	$8 \sim 10 \text{ m}^2$
T-116	DecorSUN Towel Dryer	$50 \times 150 \text{ cm}$	500 W	$10 \sim 12 \text{ m}^2$

Composite Hanger I Towel Dryer

	Code	Product	Dimension	Power	Coverage
-	T-104	DecorSUN Towel Dryer	50 × 90 cm	250 W	4 ~ 6 m ²
-	T-109	DecorSUN Towel Dryer	$50 \times 110 \text{ cm}$	400 W	$8 \sim 10 \text{ m}^2$
-	T-114	DecorSUN Towel Dryer	$50 \times 150 \text{ cm}$	500 W	$10 \sim 12 \text{ m}^2$






Super Easy Installation






GOLDEN

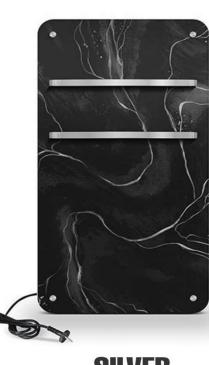

SILVER



CHROME BLACK

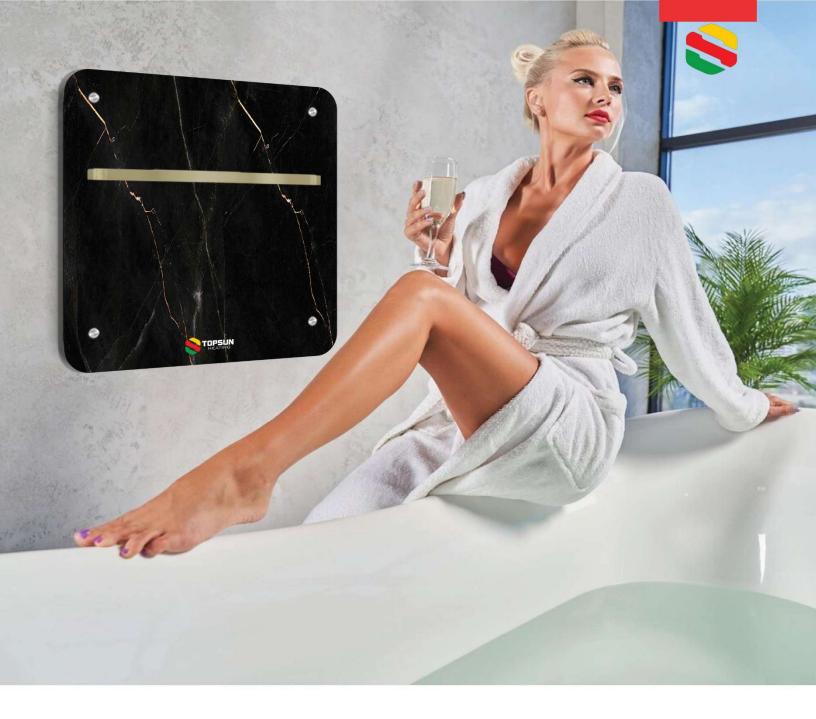

50X50 TOWEL DRYER

Hanger Number One

Coverage Area 2 - 3 m²

Grip Color Gold

Silver

Black

Power 150 Watts

Remote Control Yes Custom Image Yes





50X90

TOWEL DRYER

Hanger Number Two Coverage Area 4 - 6 m² Grip Color Gold

Silver

Black
Power 250 Watts

Remote Control Yes Custom Image Yes





50X110 TOWEL DRYER

Hanger Number Two

Coverage Area 8 - 10 m²

Grip Color

Gold


Silver Black


Power

400 Watts

Remote Control Custom Image

Yes Yes

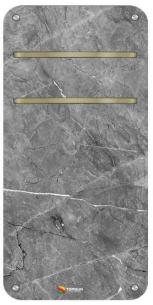

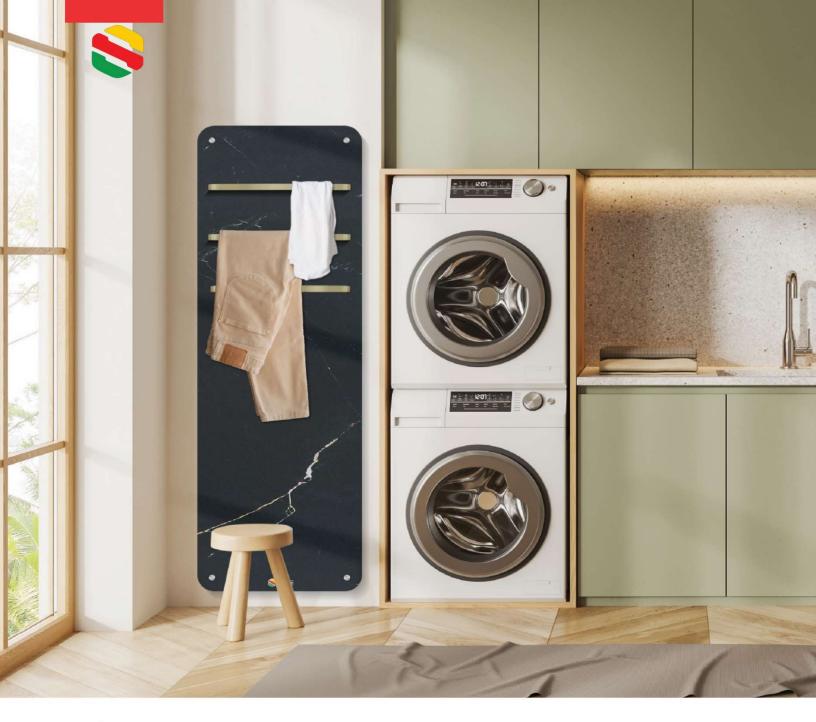

50X150

TOWEL DRYER

Hanger Number Three

Coverage Area 10 - 12 m²

Grip Color Gold

Silver

Black Power 500 Watts

Remote Control Yes Custom Image Yes





Thermostat & Controllers












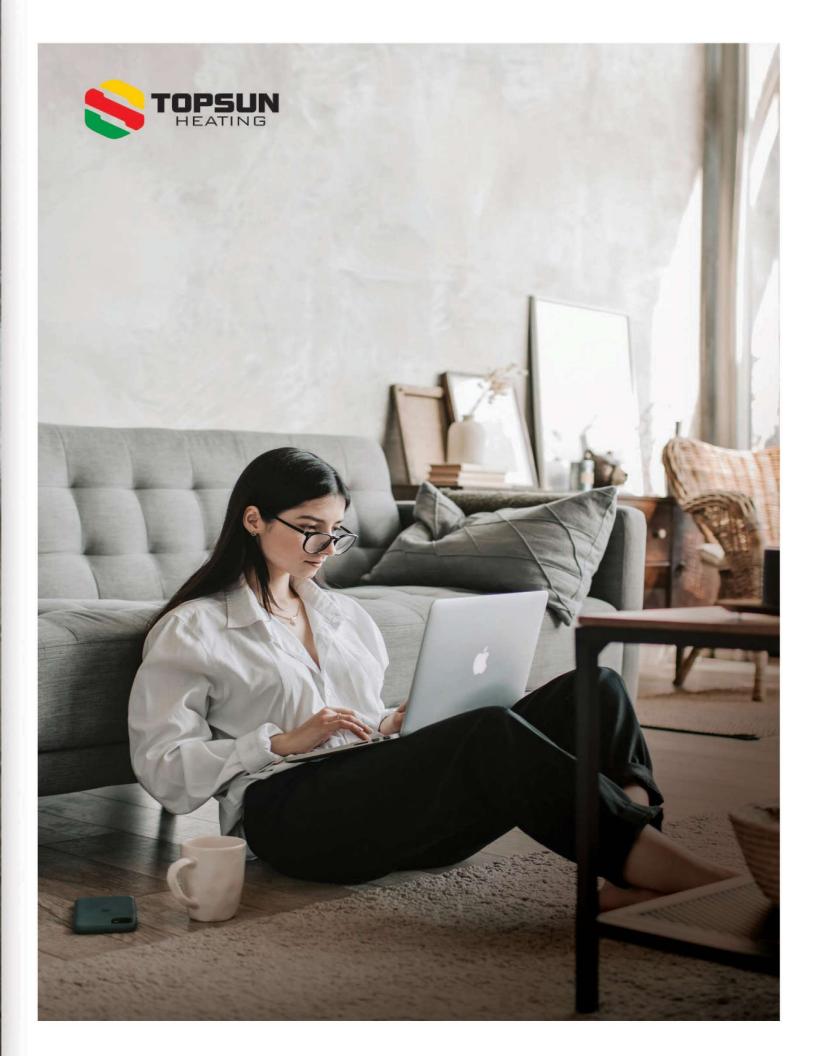

WARRANTY AND AFTER-SALES SERVICE CONDITIONS





Our Thermo Panels (DecoreSUN) for indoor products come with a 10-years warranty, ensuring a LifeTime of service






The installation guide for DecoreSUN heating panels


Required Equipment:

- 1- Marker / Pencil / Pen
- 2- Ruler
- 3- Metal Tape Measure / Cloth Tape Measure
- 4- Hammer
- 5- Square / Level
- 6- Drill Machine
- 7- Diamond Drill Bit Grade 8 (8mm diameter)
- 8- Drill Bit Grade 8 (6mm diameter)
- 9- Screws (appropriate for the drill bit diameter)
- 10- Screwdriver"

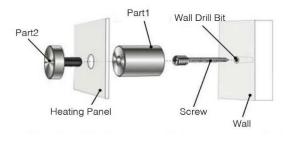

"If you are installing the panel on ceramic walls, drywall, or blocks, it is necessary to replace the mentioned drill bit in the panel installation guide with specialized drill bits (such as butterfly drill bits) or other relevant equipment suitable for the type of

- **Step 1** Selecting and marking a reference point on the wall to initiate the installation process. Note: The reference point selection should be compatible with the panel's orientation (horizontal and vertical), its dimensions, and maintaining the distance of the panel from the surrounding walls accurately. Suggestion: It's better to choose the reference point from the top part of the panel.
- **Step 2** Measuring the distance from the reference point to the horizontally aligned point corresponding to the panel's size dimensions and hole spacings, and marking it.
- **Step 3** Drawing a line between the reference point and the aligned point and verifying the alignment using a square or level.
- **Step 4** Drilling holes at the marked points using the diamond drill bit grade 8 and a drilling machine.
- **Step 5** Placing the drill bit holders in the drilled holes using hammer strikes.
- **Step 6** Removing the heating panel from its box and disassembling the metal fixtures by rotating them in a clockwise direction.
- **Step 7** Attaching piece 1 of the metal fixtures to the drill bit holders using screws and a screwdriver (clockwise direction).
- **Step 8** Positioning the panel against piece 1 of the metal fixtures and attaching piece 2 by passing it through the panel's holes into piece 1.
- Step 9 Marking two remaining drilling spots on the wall and repeating steps 3 to 8.
- Step 10 Connecting the heating panel wire to the power outlet."

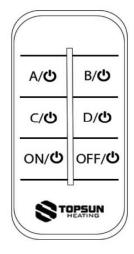

Settings for models with remote-controlled dimmers:

Button: Turns on the entire panel.

Button: Turns off the entire panel.

Electric Radiators:

Dimensions 200×90 | 150×90 cm: 4 zones | Each AIBICID button activates/deactivates one zone.

Dimensions 130×60 | 150×50 cm: 3 zones | Each AIBIC button activates/deactivates one zone.

Dimensions 110×90 | 90×90 | 80×60 | 110×60 | 110×50 | 90×50 cm:

- Using buttons AIC reduces the generated temperature by half (half of the panel on).
- Using buttons BID increases it to the maximum (entire panel on).







www.topsunheating.net info@topsunheating.net

English Site

Whatsapp: +1 778 893 8229

www.topsunheating.ir info@topsunheating.ir

Persian Site

Whatsapp: +98 912 019 8229

Call Center: +98 (0) 21 8899 3686 |+98 (0) 21 8899 3780